

## ◆ 产品简介 Introduction

LW26GS系列挂锁型电源切断开关，是LW26系列万能转换开关的派生产品。主要用作机床中要求能用挂锁锁住的电源切断开关，在断开位置(即“0”或“OFF”位)和接通位置(即“1”或“ON”位)能用挂锁锁住，以防止误操作以及控制非授权人员的操作。

产品符合国家标准GB 14048.3，国际标准IEC 60947-3。

LW26GS series Pad-lock type switches are derivatives of LW26 series rotary switches. Installed in equipment where it requires a pad-lock to lock the switch in certain position. For instance, to fix the switch in ON position, to prevent the unauthorized personnel from operating the switch.

LW26GS series Pad-lock type switch complies with the GB 14048.3 and IEC 60947.3.

## 分类 Classification

(1) 挂锁型开关按规格分20A、25A、32A、63A、125A和160A六个电流等级。

其中20A、25A有M1、M2两种规格挂锁面板，32A、63A有M2、M3两种规格挂锁面板，125A、160A为M3规格挂锁面板，M1规格挂锁面板开关可使用2把挂锁，M2和M3规格挂锁面板开关可使用3把挂锁。

注：M1、M2、M3面板分别用-1、-2、-3表示。

the LW26GS switch has 6 current ratings: 20A, 25A, 32A, 63A, 125A and 160A. For 20A and 25A is able to install M1 or M2 plate, and for 32A and 63A is able to install M2 or M3 plate, for 125A and 160A is able to install M3 plate only. The M1 plate is able to put 2 lockers, M2 and M3 is able to put 3 lockers.  
Re:-1、-2、-3 represent M1、M2、M3.

(2) 挂锁型开关按用途分普通式和急停式两种。

普通式(LW26GS-□/03)为黑面板、黑手柄，

急停式(LW26GS-□/04)有急停标志，即黄面板、红手柄。

the LW 26GS switch has two types:  
Common type, black plate black handle  
Quick stop type, with quick stop mark, yellow plate and red handle.

LW26GS-20/04-1



LW26GS-20/04-2



LW26GS-25/04-1



LW26GS-25/04-2



LW26GS-32/04-2



LW26GS-32/04-3



LW26GS-63/04-2



LW26GS-63/04-3



LW26GS-125/04-3



LW26GS-160/04-3




### ◆ 技术参数 Technical parameters

型号规格 Description	LW26GS-20	LWGS26-25	LWGS26-32	LWGS26-63	LWGS26-125	LWGS26-160
额定工作电压 Rated working voltage $U_e$ V	440	440	440	440	440	440
约定发热电流 Rated thermal current $I_{th}$ A	20	25	32	63	125	160
额定工作电流 Rated working current $I_e$						
AC-21A	A	20	25	32	63	100
AC-22A	A	20	25	32	63	100
AC-23A	A	15	22	30	57	90
额定控制功率 Power $P$						
AC-23A	kW	7.5	11	15	30	45
操作循环数 Operation						
空载 Non-load		8500	8500	8500	8500	8500
有载 Load		1500	1500	1500	1500	1500
总数 Total		10 000	10 000	10 000	10 000	10 000

### ◆ 外形尺寸和安装尺寸 Dimensions and installation

LW26GS-□/□-□

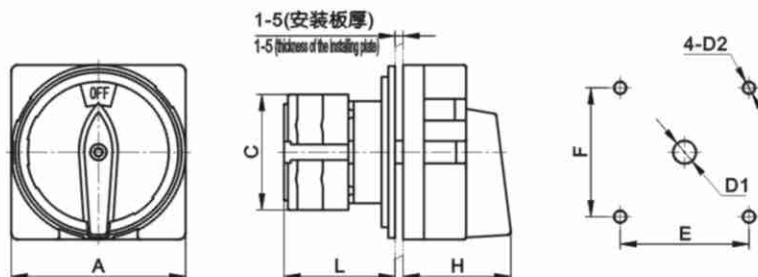

型号规格 Description	面板规格 Escutcheon plate	外形尺寸 Dimensions (mm)				安装尺寸 Installation (mm)			
		A	C	L	H	E	F	D1	D2
LW26GS-20/04-1	M1	□48	43	42	33	36	36	∅8.5	∅4.5
LW26GS-20/04-2	M2	□64	43	43	42	48	48	∅10	∅4.5
LW26GS-25/04-1	M1	□48	45.2	50	33	36	36	∅8.5	∅4.5
LW26GS-25/04-2	M2	□64	45.2	51	42	48	48	∅10	∅4.5
LW26GS-32/04-2	M2	□64	58	55	42	48	48	∅10	∅4.5
LW26GS-32/04-3	M3	□88	58	55	52	68	68	∅13	∅6
LW26GS-63/04-2	M2	□64	66	72.5	42	48	48	∅10	∅4.5
LW26GS-63/04-3	M3	□88	66	72.5	52	68	68	∅13	∅6
LW26GS-125/04-3	M3	□88	84	88	52	68	68	∅13	∅6
LW26GS-160/04-3	M3	□88	88	100	52	68	68	∅13	∅6